

E4 1-1/2" Bolted Metallic Pumps Specifications and Performance

SPECIFICATIONS

E4

FLOW RATE (Adjustable) ... 0-72 gpm (0-275 lpm)

PORT SIZE

Inlet and Outlet 1.50" ANSI/DIN

AIR INLET 0.50" NPT

AIR EXHAUST 0.75" NPT

SUCTION LIFT ... 15' Dry/25' Wet (4.57m/7.62m)

Teflon® 10' Dry/20' Wet (3.05m/6.09m)

MAX. PARTICLE SIZE (Dia.) 0.1875" (4.76mm)

SHIPPING WEIGHTS

Stainless Steel 65 lbs (29.5 kg)


Hastelloy C 68 lbs (30.8 kg)



PERFORMANCE

Determined by actual flow meter tests.

E4

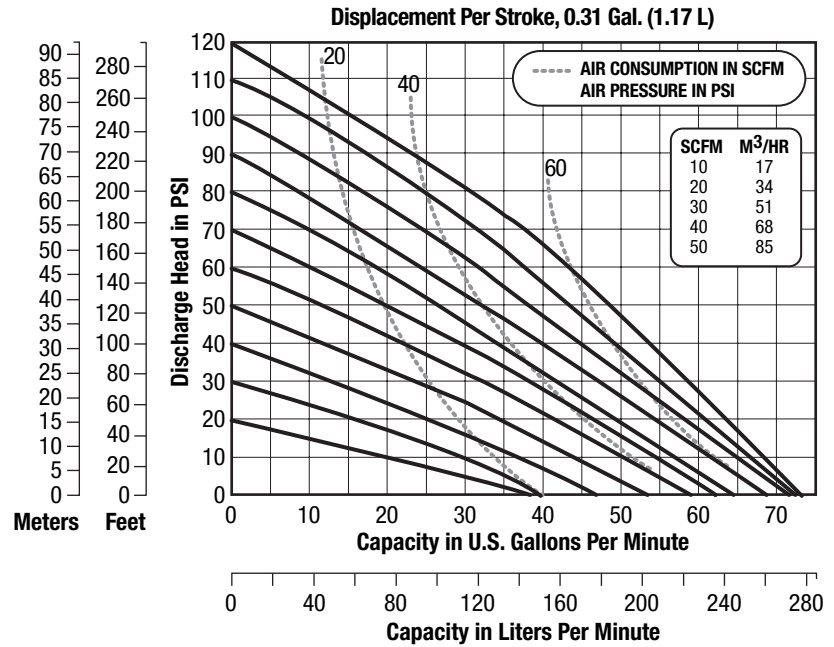

NOTE: For E4 pumps fitted with Teflon® diaphragms, reduce water discharge figures by 20%. Suction lift is reduced to 10' (3.05m) dry and 20' (6.10m) wet.

CAUTION: Do not exceed 125 psig (8.5 bars) air supply or liquid pressure.
Horizontal Discharge Model Available.

DIMENSIONS

Consult factory for certified drawings.

E4

