

---

PN: 155760 380V50Hz 157799 415V50Hz 153440 440V60Hz  
158842 415V50Hz 931093 380V60Hz

## Introduction

### ► Feature

- Lifting capacity: 500 kg at wire rope top layer
- Lifting height: 58 m
- Lifting speed: 12~18 m/min at 50Hz ; 14~22m/min at 60Hz
- Brake: Electromagnetic spring-applied failsafe brake
- Control: Pendant switch powers the winch

### ► Unpacking

- Winch assembly 1pc
- Wire rope 7 mm x 60 m 1pc
- Weight hook CHW-0005 1pc
- Pendant switch CPB-213 w/cord 3.5 mm<sup>2</sup> x 5C x 6 m 1pc
- PN 158842 excludes remote control Part No. **19**

### ► Read this manual carefully

You should carefully read and understand this manual before operating it. Careless winch operation may result in personal injury hazards or property damage.

### ► Information requesting or parts ordering

Please specify the followings information:

- Winch PN
- Serial number
- Part description
- Replacement part number
- Quantity for each part


# Installation

Before using the winch, make sure all electrical components have no corrosion or damaged; the environment should be clear and dry.

## ► Performance

Winch Model			CP-500T									
Motor	kw x p	1.8 x 4										
Recommend Wire Rope	Size (mm)	7										
	Breaking (kg)	2,700										
1 <sup>st</sup> Layer	Rated Load (kg)	50Hz	757	2 <sup>nd</sup> Layer	Rated Load (kg)	50Hz	671	3 <sup>rd</sup> Layer	Rated Load (kg)	50Hz	602	
		60Hz				60Hz				60Hz		
	Speed (m/min)	50Hz	12		Speed (m/min)	50Hz	13.4		Speed (M/min)	50Hz	14.9	
		60Hz	14			60Hz	16			60Hz	17.8	
Rope-Winding Cumulating Sum (m)			10	Rope-Winding Cumulating Sum (m)			22	Rope-Winding Cumulating Sum (m)			35	
4 <sup>th</sup> Layer	Rated Load (kg)	50Hz	546	5 <sup>th</sup> Layer	Rated Load (kg)	50Hz	500					
		60Hz				60Hz						
	Speed (m/min)	50Hz	16.4		Speed (m/min)	50Hz	18					
		60Hz	19.6			60Hz	22					
Rope-Winding Cumulating Sum (m)			50	Rope-Winding Cumulating Sum (m)			60					

## ► Wiring Diagram

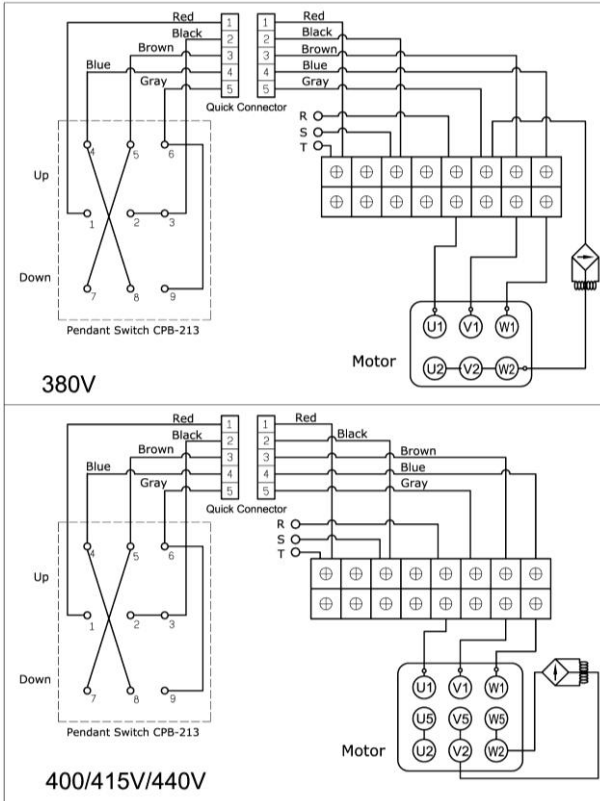

## Warning

- The winch is not intended to be used in any manner for the movement or lifting of personnel.
- The lifting capacity shown is based on the top layer of rope on the drum.
- The rope winding on the drum shall remain 5 wraps from the drum.

## Parts List

Item No.	Description	Part No	Qty
1	Induction motor kit 380V	880459	1
	Induction motor kit 415V	880460	
	Induction motor kit 380V/60Hz	880457	
2	<b>Control box</b>	880957	1
3	Bridge rectifier CBR-072	880425	1
4	Support bracket	880426	2
5	Drum kit	880427	1
6-1	Tie bar	880428	1
6-2	Tie bar kit	880429	2
6-3	Tie bar kit	880430	2
7	2 <sup>nd</sup> shaft kit	880431	1
8	Gear box kit	880432	1
9	1 <sup>st</sup> stage carrier	881301	1
10	1 <sup>st</sup> shaft kit	881302	1
11	Conductor kit	880435	1
12	Brake coil	880436	1
13	Conductor plate A	880438	2
14	Brake disc	880379	2
15	Hex socket	880440	1
16	Conductor plate A kit	880437	1
17	Brake cover	880442	1
18	Wire rope <b>w/weight hook</b>	880443	1
19	Remote control, CPB-213	880387	1

# Winch Assembly

